


## LBE-5AC-LR-5

SKU 021031 · LBE-5AC-LR

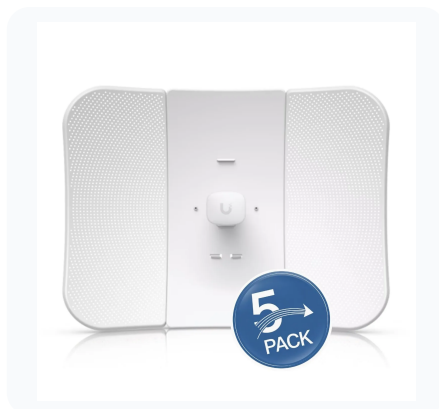

MARCA · UBIQUITI

## LBE-5AC-LR

An affordable airMAX AC CPE designed for long-distance links.

## ESPECIFICACIONES TÉCNICAS

## MECÁNICA

Dimensiones	512 x 385.8 x 258.3 mm, (20.2 x 15.2 x 10.2")
Peso	Without mount: 1.4 kg (3 lb), With mount: 1.7 kg (3.8 lb)
Enclosure Materials	Aluminum, polycarbonate
Montaje	Pole Mount (incluido)
Wind Loading	550 N at 200 km/h (123.6 lbf at 125 mph)
Wind Survivability	200 km/h (125 mph)

## HARDWARE

Interfaz de red	(1) GbE RJ45 port
Método de alimentación	Passive PoE 2-pair (4, 5+; 7, 8 return)
Fuente de poder	24V, 0.3A gigabit PoE adapter (incluido)
Rango de voltaje	20-27V DC
Consumo máximo	7W

## LEDS

Power	Sí
Ethernet	Sí
Temperatura de operación	-40 to 70° C (-40 to 158° F)
Humedad de operación	5 to 95%, no condensada
Cumple NDAA	Sí
Certificaciones	CE, FCC, IC, Anatel: 09760-19-08356

## SOFTWARE

Operating Modes	Access Point, Station
FUNCIONES UBIQUITI ESPECÍFICAS	
airMAX AC Mode	Sí
Discovery Protocol	Sí
Frequency Band Offset	Sí
Traffic Shaping with Burst Support	Sí
30/50/60 MHz Channels	Sí

## SERVICIOS

Bridging	Sí
DHCP	Sí
Ping Watchdog	Sí
Routing	Sí
SNMP	Sí
SSH	Sí
Webserver	Sí

## AJUSTE DE DISTANCIA

Ackless Mode	Sí
Dynamic Ack	Sí
QoS	WMM packet classification with user-level priority: High, Medium, Low

## REPORTES ESTADÍSTICOS

Data Rates	Sí
Ethernet Link Rate	Sí
Packet Errors	Sí
Up Time	Sí
Wireless Distance	Sí

## SISTEMA