

DHI-HY-L151

LoRa Sounder Strobe



- Completes EMC test, it has strong anti-electromagnetic interference ability, high stability and reliability
- Ultra-low consumption and strong loading capacity
- Loud sound output over 75 dB(A) at 3 meters, accompanied with bright alarm signal
- Contacts material is highly acid-resistant and rust-resistant

System Overview

DHI-HY-L151 LoRa Sounder Strobe can be connected to the Addressable Fire Alarm Control Panel. Compatible with wireless gateway, it transmits information through LoRa networking. It sends out an audible and light alarm signal to remind people when fire occurs.

Functions

Audible and light alarm

When alarm is triggered, an audible and light alarm signal is sent out.

Wireless communication

Without wiring, easy installation.


Scene

It is suitable for hotels, shopping malls, office buildings, underground garages, and other crowded or large buildings.


Technical Specification

Communication	LoRa
RF Frequency	470 MHz-510 MHz
Communication Distance	Free space: a maximum of 1500 metres Ordinary walls: 3-5
Alarm Mode	Visual and audible alarm
Alarm Volume	75 dB-115 dB (A) at 3 m (9.84 ft)
Alarm Output	RF transmission
Silence Duration	≤ 100 s
Operating Voltage	DC3V
Operating Current	Monitoring Current: ≤150uA Alarm Current: ≤50mA
LED Instruction	Alarm: Red indicator flashes once every second Fault: Yellow indicator flashes once every minute Standby: Green indicator flashes once every minute
Battery Life	Standby: 1 year Alarm: continuously 12 hours
Battery	DC3V, 2400mAh
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Storage Temperature	-20°C to +60°C (-4°F to +140°F)
Operating Humidity	≤ 95% RH (no condensation)
Dimensions (with base)	106.5 mm × 157.5 mm × 54 mm (4.19" × 6.20" × 2.13")
Weight (with base and battery)	260 g (0.57 lb)
Installation	Wall Mount
Color	Red
Certifications	CE

Installation

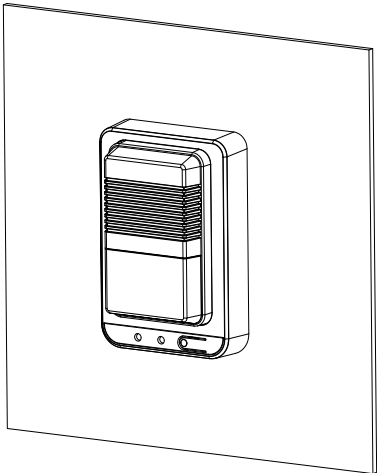

Dimensions (mm/inch)

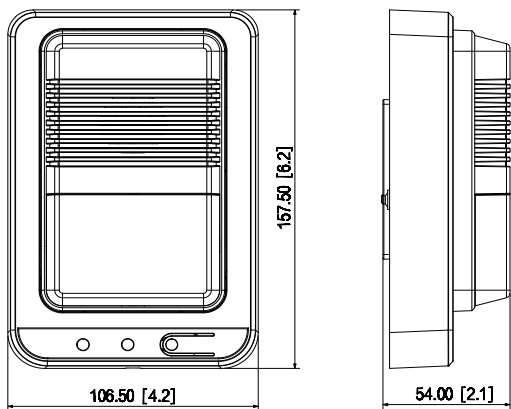

Ordering Information		
Type	Model	Description
LoRa Sounder Strobe	DHI-HY-L151	LoRa Sounder Strobe