

# PFM800-E

1-Channel Passive HDCVI Balun



## Features

- Real-time transmission over UTP CAT5E/6 cable;
- Passive, no need for power supply;
- With female BNC connector, and pluggable screw terminal connections.


## Technical Specifications

<b>Model</b>	<b>PFM800-E</b>
<b>Properties</b>	
Transmission Signal	1-channel
Transmission Distance	HDCVI 720P: max. 400m(1312.34ft) 1080P: max. 250m(820.21ft)
Category Type	UTP CAT 5E/6
<b>Video Transmission Properties</b>	
Coaxial Video Connector	BNC-M
Twisted-pair Video Connector	Push-terminal
Compatible Format	HDCVI/AHD/TVI/CVBS
Resolution	720P/1080P
Anti-interference	>60db
<b>Protection</b>	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per: IEC61000-4-2
Coaxial Cable Connector	2KV(common-mode) Per: IEC61000-4-5
UTP Cable Connector	2KV(different-mode), 4KV(common-mode), Per: IEC61000-4-5
<b>Impedance</b>	
BNC Male	75 ohms
UTP Cable	100 ohms
<b>Physical Properties</b>	
Dimension(LxWxH)	180mmx19mmx16mm(7.09"x0.75"x0.63")
Shell	ABS
Color	Black
N.W.	42g/pair (0.09lb)
<b>Stability</b>	
MTBF	>10000h
<b>Environmental</b>	
Operating Temperature	-10°C~+55°C(+14°F~+131°F)
Storage Temperature	-20°C~+70°C(-4°F~+158°F)
Humidity	0~95%(non-condensing)


## Order Information

Type	Part Number	Description
HDCVI Accessories	<b>PFM800-E</b>	<b>1-channel passive Balun</b>
	PFM800-4MP	1-channel passive Balun
	PFM801-4MP	1-channel passive HDCVI Balun with power
	PFM809-4MP	16-channel passive HDCVI Balun
Related Accessories	PFM920I-5EUN	305m UTP CAT5E cable
	PFM920I-5EU-C/U	305m UTP CAT5E cable
	PFM920I-6UN-C/U	305m UTP CAT6 cable
	PFM920I-6U-C/U	305m UTP CAT6 cable

## Dimensions (mm/inch)

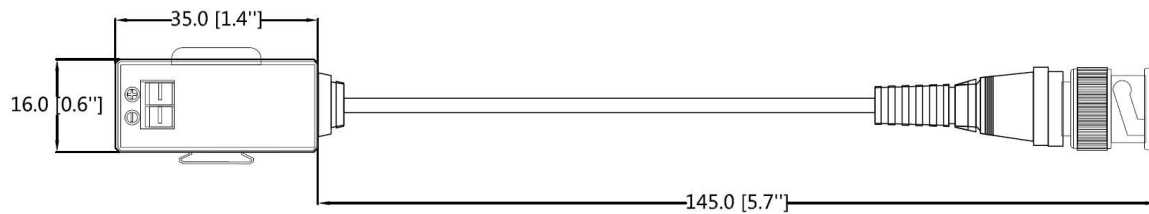

## Application

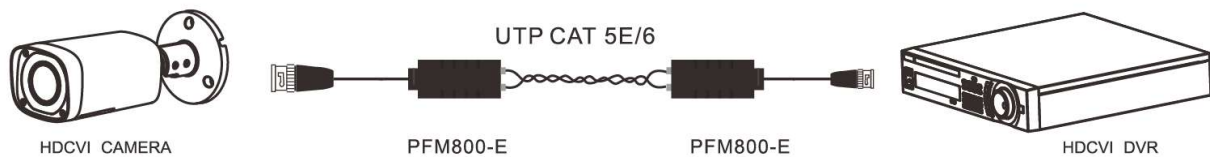

## Package Information

- 1-Channel Passive HDCVI Balun PFM800-E \*1 pair