

DH-PFM920-6UN

305m Outdoor U/UTP CAT6 Network Cable (Black, PE sheath)



- 305 m (1000 ft)/carton Outdoor U/UTP CAT6, power over Ethernet, compatible with one cable.
- High-purity oxygen-free copper conductor material.
- Customized PE outer sheath, certain degree of waterproof. Environmentally friendly and all materials used are RoHS compliant.
- 10-year warranty.

Series Overview

Network cables are the most commonly used transmission mediums in generic cabling system. It is usually composed of 4 pairs of twisted wires, and is generally applied in system cabling within 100 meters.

Technical Specification

Conductor

Material	Oxygen free copper (99.97% purity)
Conductor Structure	0.53 mm ± 0.02 mm (0.02" ± 0.0008")
American Wire Gauge	24AWG

Insulation

Insulating Material	HDPE
Min. Average Thickness	0.21 mm (0.0083")
Insulation Diameter	0.95 mm ± 0.06 mm (0.04" ± 0.0024")
Insulation Color	8 cores, Blue, white/blue; Orange, white/orange; Green, white/green; Brown, white/brown

Rip Cord

Material	Polyester
Specification	3 × 150D

Separator

Material	PE
Specification	Translucent 4.3 × 0.35 mm

Inner Sheath

Material	PVC
Min. Average Thickness	0.45 mm (0.02")

Diameter	5.6 mm ± 0.4 mm (0.22" ± 0.02")
Color	White

Sheath

Min. Average Thickness	0.5 mm (0.02")
Sheath Material	MDPE
Sheath Diameter	6.8 mm ± 0.4 mm (0.27" ± 0.02")
Sheath Color	Black

Electrical

Max. DC Resistance of a Single Conductor	9.5 Ω@100 m (328.08 ft)
Min. Insulation Resistance	5000 MΩ·km
Max. DC Resistance Unbalance	2% (pair intra), 4% (pairs inter)
Dielectric Strength	No breakdown with 1kV DC for 1 min

Transmission

Characteristic Impedance	100 Ω ± 15 Ω
Near-end Crosstalk	≥39.30 dB/100 m@250 MHz
Max. Attenuation	34.8 dB/100 m@250 MHz
Return Loss	≥17.3 dB/100 m@250 MHz

Mechanical

Tensile Strength	Sheath≥13.5 MPa, insulation≥16 Mpa
Elongation at Break	Sheath≥150%, insulation≥300%
Installation Bending Radius	>8 times of outer cable diameter
Conductor Elongation at Break	≥10%

Environmental

Shrinkage of Insulation	≤5%
Color Migration Resistance of Insulation	No migration
Sheath Tensile Strength and Elongation at Break after Aging	≥12.5 MPa, ≥100%
Low Temperature Bending Test	No cracking after the test
Heat Shock Test	No cracking after the test
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Installation Temperature	0 °C to +50 °C (+32 °F to +122 °F)
Storage Temperature	-10 °C to +40 °C (+14 °F to +104 °F)
Storage Humidity	<60% (RH)

Security

Vertical Flame Test	Comply with IEC 60332-1-2
---------------------	---------------------------


Packaging

Cable Length	305.0 m ± 2 m (1,000.66 ft ± 6.56 ft)
Packaging Method	305 m (1,000 ft) a carton, one carton with 2 inner cartons
Packaging Dimensions	433 mm × 433 mm × 230mm (17.05" × 17.05" × 9.06") (L × W × H)
Transport Package Dimensions	495 mm × 457mm × 466mm (19.49" × 17.99" × 18.35") (L × W × H)
Net Weight	13.5 kg ± 0.6 kg (29.76 lb ± 1.32 lb)
Gross Weight	14.5 kg ± 0.6 kg (31.97 lb ± 1.32 lb)

Compliance Standard

Compliance Standard	Q/DXJ 067-2024
---------------------	----------------

Dimensions (mm[inch])

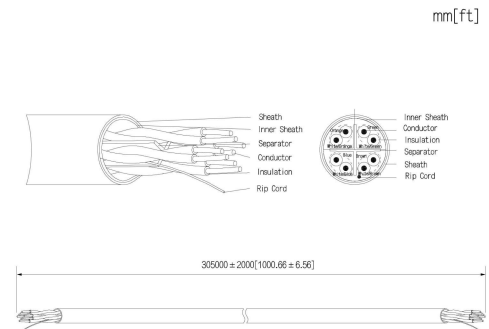

Ordering Information

Type	Model	Description
Network Cable	DH-PFM920-6UN	305m Outdoor U/UTP CAT6 Network Cable (Black, PE sheath)