

# RG-ES210GS-P

## 10-Port Gigabit Smart Cloud Managed PoE Switch, 1 Combo Port



### Highlights

- 10-port gigabit cloud managed switch with 8 PoE+ ports, 1 Combo Port
- Cost-Effective Smart Cloud Managed Switches
- IP Camera Recognition, Unique Value for CCTV Network
- Automatic Loop Prevention Ensures Service Continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

# Highlight Features

## RG-ES200 Series Switches

Gigabit access switch fits the needs in SMB network



802.3at / 802.3af




Abundant Application Scenarios



Centralized Cloud Management

## Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

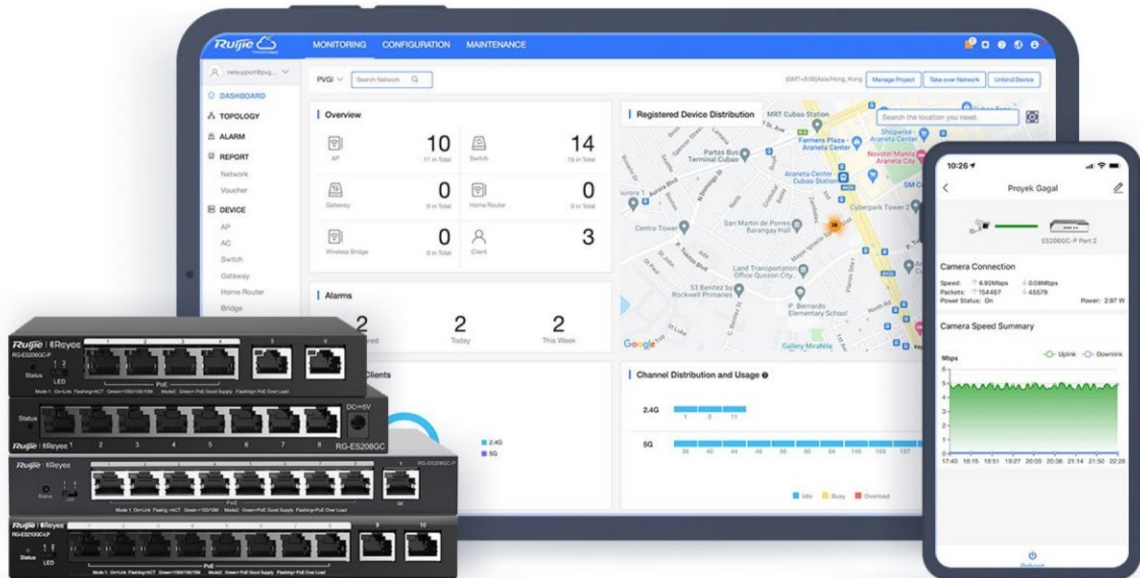

IP Camera/NVR recognition



Automatic Loop Prevention



Mobile VLAN Configuration



Intelligent PoE Adaptive

# Highlight Features

## Unique Value for CCTV Network

250 meters transmission\*

Flexible extend mode

IPC Offline Alarm

Individual port reboot

## Automatic Loop Prevention Ensures Service Continuity


Network stays connected when network loop happens

Loop Prevention  
Detects and prevents loops automatically.

## Highlight Features

### **Cloud, Make Your Business Easy**

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost

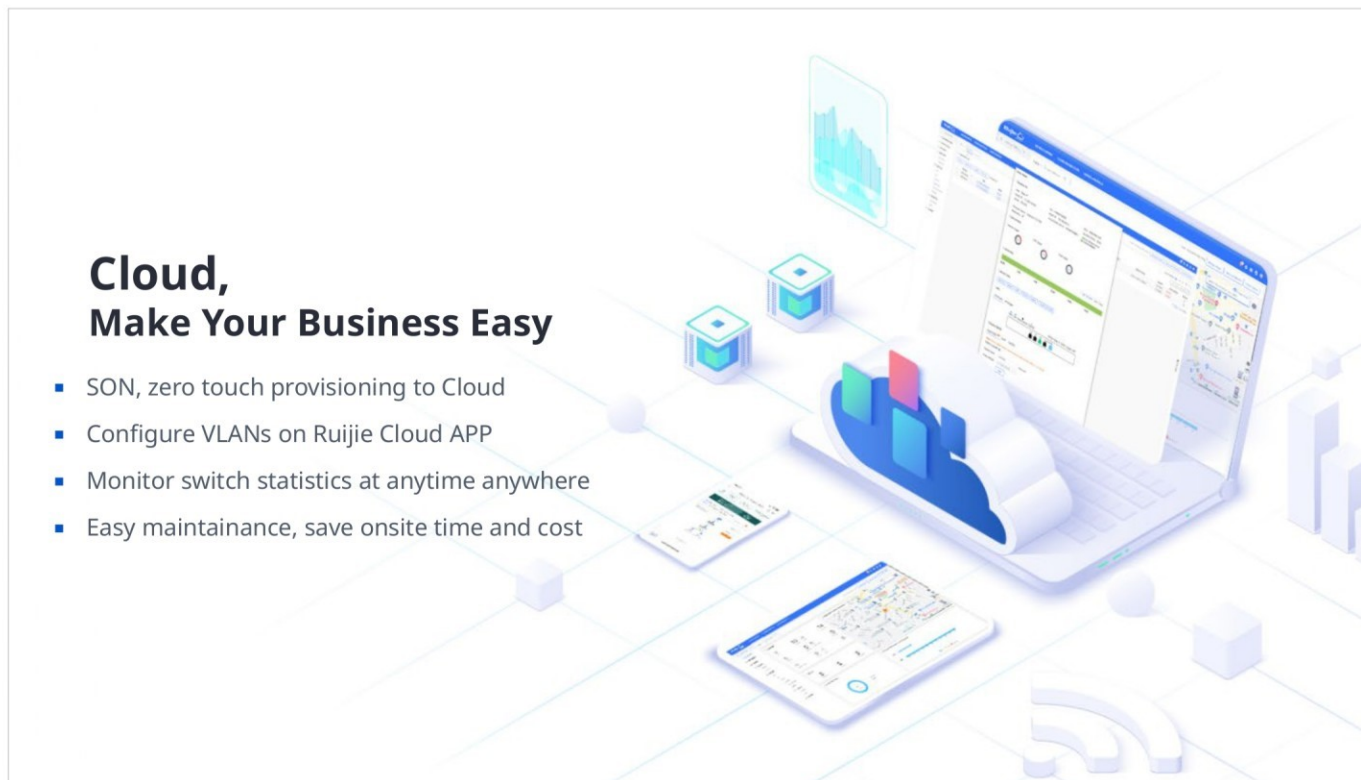

## / Product Information

<b>Model</b>	<b>RG-ES210GS-P</b>
<b>Product Category</b>	Layer 2

## / Hardware Specifications

<b>Model</b>	<b>RG-ES210GS-P</b>
<b>Product Information</b>	
<b>Warranty</b>	3 years
<b>Port Specifications</b>	
<b>Total number of RJ45 ports</b>	10
<b>Total number of optical ports</b>	1
<b>Number of 1GE combo ports</b>	1
<b>Number of 1GE SFP ports</b>	1
<b>Number of 10/100/1000BASE-T ports</b>	10
<b>Reset button</b>	1
<b>DIP switch</b>	<p>LED mode switch toggled to left (Mode 1): The port LED status indicates the status of traffic transmission. Solid green means that the port is link up, while blinking green means that the port is transmitting and receiving data.</p> <p>LED mode switch toggled to right (Mode 2): The port LED status indicates the PoE status. Solid green means that the port is supplying power, while blinking green means that the port is in power overload state.</p>
<b>Power Supply and Consumption</b>	
<b>PoE Out standard</b>	PoE/PoE+ (IEEE 802.3af/at)
<b>Number of PoE Out ports</b>	8
<b>Number of PoE/PoE+ Out ports</b>	8
<b>PoE budget</b>	120 W

# Hardware Specifications

Model	RG-ES210GS-P
PoE power pins	1-2 (+), 3-6 (-)
Power input	DC adapter: <ul style="list-style-type: none"><li>• Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz</li><li>• Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz</li></ul> Output: <ul style="list-style-type: none"><li>• Rated input current: 2.5 A</li><li>• Rated output voltage: 54 V DC</li><li>• Maximum output current: 2.4 A</li></ul>
Maximum power consumption	10 W (with no PoE load) 130 W (with PoE full load)
Power supply	DC power adapter
<b>System Specifications</b>	
CPU	MAC chip, single-core processor, 62.5 MHz clock frequency
Flash memory	4 MB
Forwarding rate	14.8 Mpps
Switching capacity	20 Gbps(bit/s)
<b>Dimensions and Weight</b>	
Casing	Metal
Product dimensions (W x D x H)	202 mm x 108 mm x 28 mm (7.95 in. x 4.25 in. x 1.10 in.)
Weight	0.55 kg (1.21 lbs) (without packaging materials) 1.65 kg (3.64 lbs) (with packaging materials)
Shipping weight	1.65 kg (3.64 lbs)
<b>Environment and Reliability</b>	
Fan	Fanless design
Cooling	Natural cooling
Mounting options	Wall/Desk
Hot swapping of cables	Hot swapping supported by the service port and power connector
MTBF	200,000 hours
Operating temperature	0°C to 40°C (32°F to 104°F)

# Hardware Specifications

Model	RG-ES210GS-P
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	-500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 8 kV Contact discharge: 6 kV
Surge protection	Service port: ±6 kV for common mode Power connector: ±4 kV for common mode and ±2 kV for differential mode
<b>Certification and Regulatory Compliance</b>	
EMC	EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	EN 62638-1
Certification	CE, FCC

# Software Specifications

Model	RG-ES210GS-P
<b>Authentication</b>	
RADIUS	No
802.1X authentication	No
<b>Basic Configurations</b>	
PoE watchdog	Yes
Online upgrade	Yes
<b>Ethernet Switching</b>	
Maximum number of VLANs	16
Maximum number of MAC address entries	4000
Interface flow control	Yes
IEEE 802.1Q VLAN	Yes
VLAN configuration supported on LAN ports	Yes
LLDP	No
LLDP-MED	No
Static MAC address	Yes
Static aggregation	No
LACP	No
Inbound or outbound rate limiting based on interface traffic	Yes
<b>Gateway Features</b>	
802.1p priority-based traffic classification	No
DSCP priority-based traffic classification	No
<b>Interface</b>	

# Software Specifications

Model	RG-ES210GS-P
Jumbo frame length (MTU)	9216 bytes
EEE	Yes
Cable test	Yes
<b>IP Routing</b>	
IPv4 static route	No
IPv6 static route	No
OSPFv2	No
OSPFv3	No
<b>IP Service</b>	
ARP	No
IPv4 ping	No
IPv4 traceroute	No
ICMPv6	No
IPv6 ping	No
IPv6 traceroute	No
DNS client	Yes
DHCP client	Yes
<b>Multicast</b>	
IGMPv1 snooping	No
IGMPv2 snooping	No
Basic IGMPv3 snooping	No
Full IGMPv3 snooping	No
IGMP filtering	No
IGMPv1, v2, and v3	No

# Software Specifications

Model	RG-ES210GS-P
<b>Network Management and Monitoring</b>	
Mirroring	Yes
HTTP login	Yes
HTTPS login	No
SON	Yes
Syslog	No
Camera detection	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	No
<b>Security</b>	
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	No
Extended MAC ACL	No
Extended IP ACL	No
IPv6 ACL	No
ARP anti-spoofing	No
CPU Protection Policy	Yes
<b>System Performance Capacity</b>	

# Software Specifications

Model	RG-ES210GS-P
Recommended camera limit	200W H265: 40 400W H265: 20

## Package Contents

Model	RG-ES210GS-P
<b>Device</b>	
<b>Device</b>	1
<b>Accessories</b>	
<b>Power cord</b>	1 x 0.8 m (2.62 ft.), 1 x 1 m (3.28 ft.), 1 x 1.2 m (3.94 ft.) or 1 x 1.5 m (4.92 ft.) Note: There are four power cord lengths. Please refer to the actual delivery.
<b>Manual</b>	
<b>User Manual</b>	1
<b>Warranty Card</b>	1

**Ruijie** | **Reyee**

 **R**edefine **y**our **e**asy **n**etwork



**Ruijie Networks Co., Ltd.**

Official Website: <https://Reyee.Ruijie.com>